

PCA SOLUTIONS

Durable, High Performing, Fire Retardant, AND Lighter Weight
Your ramp service teams will thank you!

FEATURES:

- **SIGNIFICANTLY** LIGHTER WEIGHT THAN THE COMPETITION
- **EVERY LAYER** COMPRISED OF FIRE RETARDANT MATERIALS THAT MEET **FAR 25.853**
- 6" INDUSTRIAL STRENGTH HOOK & LOOP FASTENER ATTACHMENT CONFIGURATION
- THERMAL BARRIER MEETS REEVES TEST SPECS FOR MAINTAINING COOLED & HEATED AIR FLOW TEMPERATURES
- DURABLE, ABRASION RESISTANT EXTERIOR
- CUSTOM LENGTHS AVAILABLE
- LAY-FLAT, EASY TO STORE DESIGN

Features standard on products **9500-20, 9500-25, 9500-30**




AVAILABLE IN 20 (9500-20), 25 (9500-25), AND 30 FT LENGTHS OR CUSTOM SIZES TO FIT YOUR INDIVIDUAL NEED.

Durable Outer Layer: 1000 Denier heavy duty material resists abrasion and mildew for longer life

Outward-facing Center Layer: Thermal barrier maintains heated and cooled air temperatures

Ultra-strong Interior Layer: 600 Denier reinforced polyester stands up to high pressure air-flow and rigorous use on the ramp.

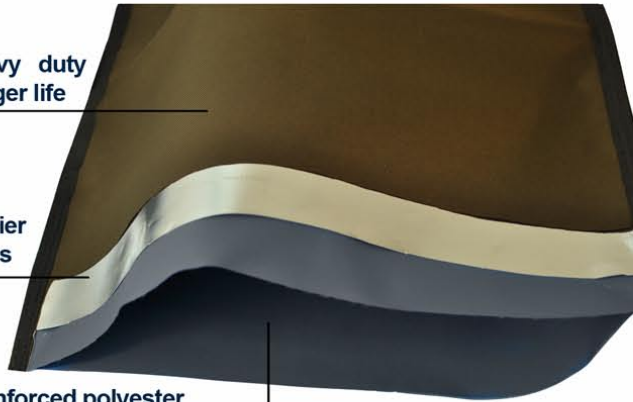

**9501-END
A/C DUCT REDUCER**

Reducer features the same durable and thermal construction as our hoses. 6" hook & loop connection reduces from 14" to 8"



6" Industrial hook & loop fastener attachment configuration allows for a secure bond that's easy to quickly attach and detach at both ends.



**9400-14-40
A/C DUCT CONNECTER**